


Digimage System, DI-01

- Effective Pixels Approx. 24.2 megapixels (Total Pixels Approx. 25.8 megapixels)
- High resolution 8" TFT screen
- Digital control panel
- Compact chamber and lightweight
- Can be operated PC free
- Inner white light LED at two sides
- Safety door switch
- Optional gel analysis software package available
- Universal rated voltage: 100-240V~

*Could be bundled with MBE-200A.

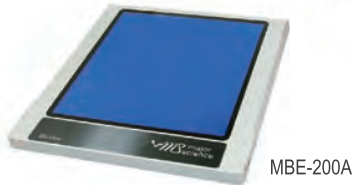

CE

SmartView Simple Imager System MUV-IMG series



*PC / Tablet is not included.

CE

White light plate
DI-WLA3 (297x400mm)
DI-WLA4 (210x297mm)
DI-WLA6 (105x150mm)



Cat. No.	MUV-IMG-CA	DI-01	DI-HD
Camera / Lens	24.2MP digital camera, Wi-Fi function		N/A
Display / Control panel	Digital camera		
Max. aperture	f/3.5-6.3 (IS STM Lens)		N/A

*All images are for reference only, actual products might differ from the pictures above.
*Filters are necessary part for Gel Documentation System.
*All filters have to be ordered separately and discuss with local dealer before order.

Transilluminator

SmartView Transilluminator / UV Transilluminator

- 312nm UV for gel observation; 254nm UV for irradiate samples; 365nm UV for gel cutting/imaging and avoid photonicking

*High performance UV light model also available.




SmartView Transilluminator MUVB-100 series



FC CE

UV Transilluminator MUV series



Cat. No.	MUVB-111	MUVB-121	MUVB-122	MUV26	MUV21
Wavelength	single 312nm	dual 254 / 312nm	dual 254 / 365nm	254 / 312 (302) / 365nm	
Filter size (mm) (WxL)	210x210			260x210	210x210
Light source	8W x 5 tubes, with built-in UV light and 470nm Epi blue light	8W x 9 tubes, with built-in UV light and 470nm Epi blue light		8W x 6 tubes	
Intensity switch	High (100%) / Low (70%) intensity switch for single wavelength mode				

*Please visit our website at www.majorsci.com for more product selection and detailed information.